

## 5200 LED SERIES

ALUMINUM OR STAINLESS  
IP66

FOR USE IN NON-  
HAZARDOUS LOCATIONS



### FEATURES & SPECIFICATIONS:

#### Construction

- Heavy-duty, copper-free aluminium formed and welded housing and door frame
- Available in 2' and 4' lengths
- All external hardware is stainless steel to resist corrosion
- One-piece, high temperature propylene gasket provides a water-tight seal between the door frame & housing
- Latching system allows for tool free access (see insert below)
- 1/2" hub-supplied on one end, with option for dual hubs for thru wiring (specify hub size)
- Standard finish is natural aluminum

#### Optical System

- Impact resistant polycarbonate lens standard, other lenses available

#### Electrical System

- Maximum output 10,750 Lumens at 88W, other wattages available
- 121 Lumens per watt or greater
- Operating temperature from -40\* C to 55\*C
- Driver operates at 120-277V, 50/60Hz
- CRI > 80 at 3000K, 3500K & 4000K (standard)
- 5 year warranty on LED system when installed per instructions

#### OPTIONS:


- Adjustable mounting bracket kit
- Hubs on both ends for thru wiring (specify size)
- 4' Stainless steel safety cable

#### Shipping Weight:

- 20 LBS Aluminum
- 29 LBS Stainless Steel
- 29 LBS Zinc-Plated Steel

#### SNELSON'S

#### TOOL-FREE LATCHING SYSTEM

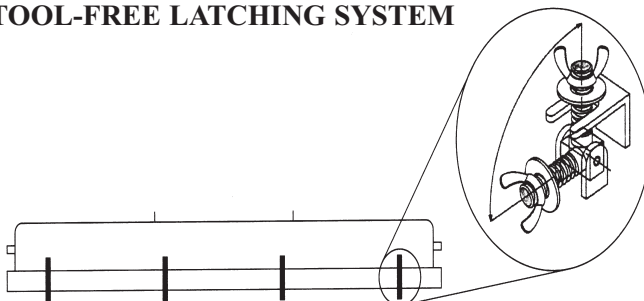

# 5200 SERIES LED

## ORDERING INFORMATION

SERIES	MATERIAL	LED WATTAGE	VOLTAGE	OPTIONS
[ ]	*	**	U	----
<b>SERIES</b> 52L2 = 2' 52L4 = 4'	<b>MATERIAL</b> A = ALUMINUM SS = STAINLESS STEEL ZP = ZINC PLATED STEEL	<b>LED WATTAGE</b> 2' MODEL 20 = 27W 40 = 44W  4' MODEL 50 = 54W 80 = 77W 90 = 88W	<b>VOLTAGE</b> U = 120-277 (<10% THD)	C = 1/2" HUB ONE END D = 1/2" HUB BOTH ENDS E = 3/4" HUB ONE END F = 3/4" HUB BOTH ENDS EM = EMERGENCY BATTERY (CONSULT FACTORY)

## MOUNTING OPTIONS



4315



5030



5032



5037




5040



ADJUSTABLE MOUNTING KIT  
5022

## DIMENSIONS

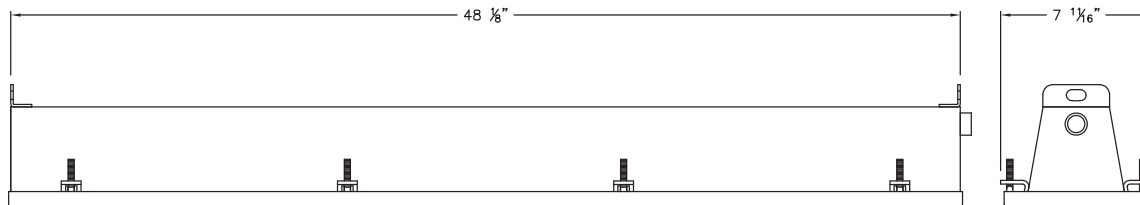

SNELSON OILFIELD LIGHTING  
8622 FAIRBANKS N HOUSTON RD  
HOUSTON, TX 77043

[www.snelsonlights.com](http://www.snelsonlights.com)

713-937-3600