

FEATURES & SPECIFICATIONS:

Construction

- Body is one-piece fiberglass reinforced polyester with an internal corrosion-resistant channel constructed of .04" pre-painted aluminum
- Housing includes eight stainless steel latches that provide a positive seal between the diffuser and gasket
- Mounting brackets
- 1/2" watertight aluminum hubs furnished standard, stainless steel optional

Optical system

- Standard lens is a high impact 100% DR acrylic diffuser with an internal crepe pattern allowing a smooth exterior surface for ease of cleaning
- The diffuser flange fits snugly into the gasketed retention slot forming a continuous tight seal

Electrical System

- Maximum output 13,544 lumens
- Industry leading 154 lumens per watt
- Operating temperature -40* to 55*C
- Mean Well driver operates at 120-277V, 50/60HZ
- Osram LED's CRI >80 at 4000K (Standard)

LISTINGS:

ETL Tested to UL 844
Class I, Div. 2 Groups A, B, C & D
ETL Tested to UL 1598A
Marine/Outdoor use
ABS Approved

APPLICATIONS:

- Hazardous locations where dust, dirt, corrosive & wet conditions are present
- Wastewater treatment plants
- Refrigerated areas
- Car washes
- Cold storage
- Canopies

OPTIONS:

- 3000K, 3500K & 5000K
*4000K Standard
- Emergency battery backup

SHIPPING WEIGHT:


- 11 lbs

6100 SERIES


ORDERING INFORMATION

SERIES/LENGTH	LIGHT SOURCE	WATTAGE	VOLTAGE	OPTIONS
61	L4	**	U	
61 = 6100 SERIES	L4 = LED 4'	20 = 25W (3,850 LUMENS) 30 = 35W (5,390 LUMENS) 40 = 45W (6,776 LUMENS) 50 = 55W (7,854 LUMENS) 60 = 60W (9,240 LUMENS) 70 = 70W (10,780 LUMENS) 80 = 80W (12,370 LUMENS) 90 = 88W (13,552 LUMENS)	U* = 120-277V 50/60HZ (Standard) 347V = 347 VOLT 480V = 480 VOLT	OPTIONS *4000K CCT STANDARD 30K = 3000K CCT 35K = 3500K CCT 50K = 5000K CCT SC4 = 4' SAFETY CABLE SSH = STAINLESS STEEL HUBS EM = EMERGENCY BATTERY PACK


DIMENSIONS

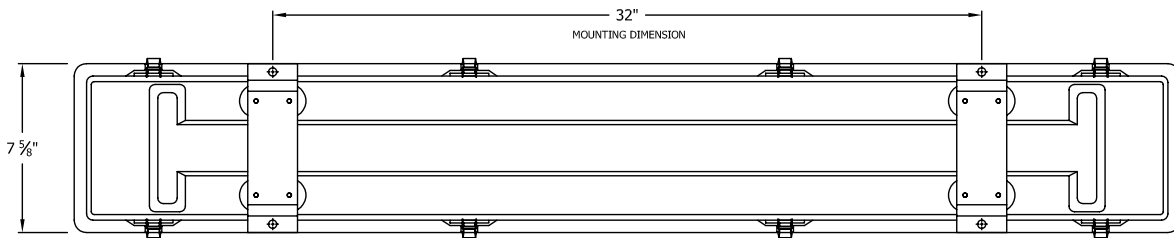

TOP VIEW



END VIEW

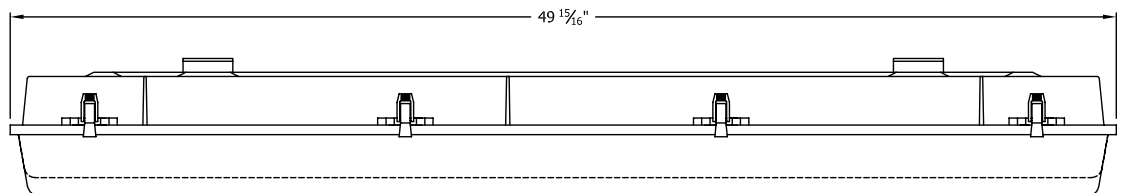

SIDE VIEW



SNELSON OILFIELD LIGHTING
 8622 FAIRBANKS N HOUSTON RD
 HOUSTON, TX 77043

www.snelsonlights.com

713-937-3600