

6200 LED SERIES

ALUMINUM OR
STAINLESS STEEL LED
HAZARDOUS
CLASS I, DIV. 2
GROUPS A, B, C & D



FEATURES & SPECIFICATIONS:

Construction

- Heavy-duty, copper-free aluminium formed and welded housing and door frame
- Available in 2' and 4' lengths
- All external hardware is stainless steel to resist corrosion
- One-piece, high temperature propylene gasket provides a water-tight seal between the door frame & housing
- Latching system allows for tool free access (see insert below)
- ½" hub-supplied on one end, with option for dual hubs for thru wiring (specify hub size)
- Standard finish is natural aluminum

Optical System

- Impact resistant polycarbonate lens standard, other lenses available

Electrical System

- Maximum output 10,750 Lumens at 88W, other wattages available
- 121 Lumens per watt or greater
- Operating temperature from -40* C to 55*C
- Driver operates at 120-277V, 50/60Hz
- CRI > 80 at 3000K, 3500K & 4000K (standard)
- 5 year warranty on LED system when installed per instructions

LISTINGS:

- ETL Listed to UL 844
Class I, Div. 2 Groups A, B, C & D
- ETL Listed to UL 1595A
Marine/Outdoor use
- IP 66

APPLICATIONS:

- Land rigs
- Offshore platforms
- Drilling Rigs
- Chemical plants
- Mining
- Cold storage
- Hazardous storage areas
- Corrosive environments
- Coastal Marine facilities


OPTIONS:

- Adjustable mounting bracket kit
- Hubs on both ends for thru wiring (specify size)
- 4' Stainless steel safety cable

Shipping Weight:

- 12 LBS

INDATECH'S STAINLESS STEEL TOOL-FREE LATCHING SYSTEM

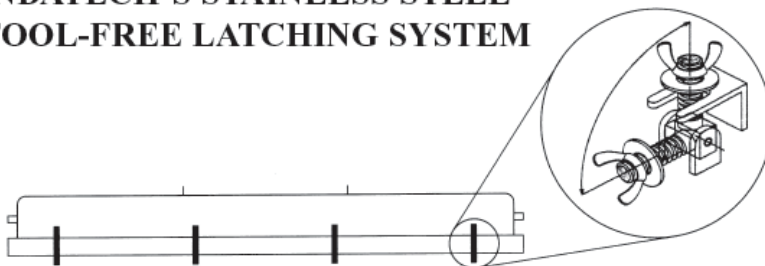

6200 LED SERIES

ORDERING INFORMATION

SERIES	MATERIAL	LED WATTAGE	VOLTAGE	OPTIONS
62L*	*	**	U	----
SERIES 62L2 = 2' 62L4 = 4'	MATERIAL A = ALUMINUM SS = STAINLESS STEEL	LED WATTAGE 2' MODEL 20 = 27W 40 = 44W 4' MODEL 50 = 54W 60 = 65W 80 = 77W 90 = 88W	VOLTAGE U = 120-277 (<10% THD)	C = 1/2" HUB ONE END D = 1/2" HUB BOTH ENDS E = 3/4" HUB ONE END F = 3/4" HUB BOTH ENDS EM = EMERGENCY BATTERY (CONSULT FACTORY)

MOUNTING OPTIONS



4315



5030



5032



5037




5040



ADJUSTABLE MOUNTING KIT
5022

DIMENSIONS

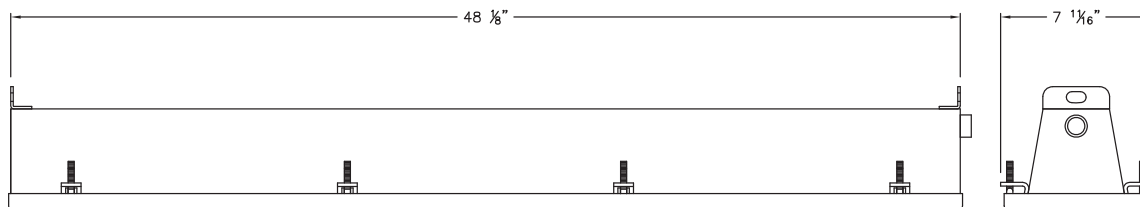

SNELSON OILFIELD LIGHTING
 8622 FAIRBANKS N HOUSTON RD
 HOUSTON, TX 77043

www.snelsonlights.com

713-937-3600