

6500 SERIES LED

HAZARDOUS LOCATION
CLASS I, DIVISION 2

CLASS II, DIVISION 1 CLASS
II, DIVISION 2 CLASS III



FEATURES & SPECIFICATIONS:

- High efficacy: up to 140lm/W
- CRI>70
- Trunnion, Pole or Slip Fitter Mounting
- Typer III, IV or V Distribution
- Copper free aluminum
- High vibration resistance
- 4000K - 5700K
- 5 year warranty
- L70 rating for more than 150,000 hours

LISTINGS:

NEMA 4X, IP66

UL1598/UL1598A/UL844

CSA C22.2 No.137/N o.250.0

Class I, Division 2, Groups A, B, C, D

Class II, Division 1, Groups E, F, G

Class II, Division 2, Groups E, F, G

Class III


Marine and Wet Locations

IECEX

ATEX

APPLICATIONS

- Drilling Rigs
- Chemical plants
- Pharmaceutical plants
- Coastal marine facilities
- Mining
- Cold storage facilities
- Hazardous storage areas

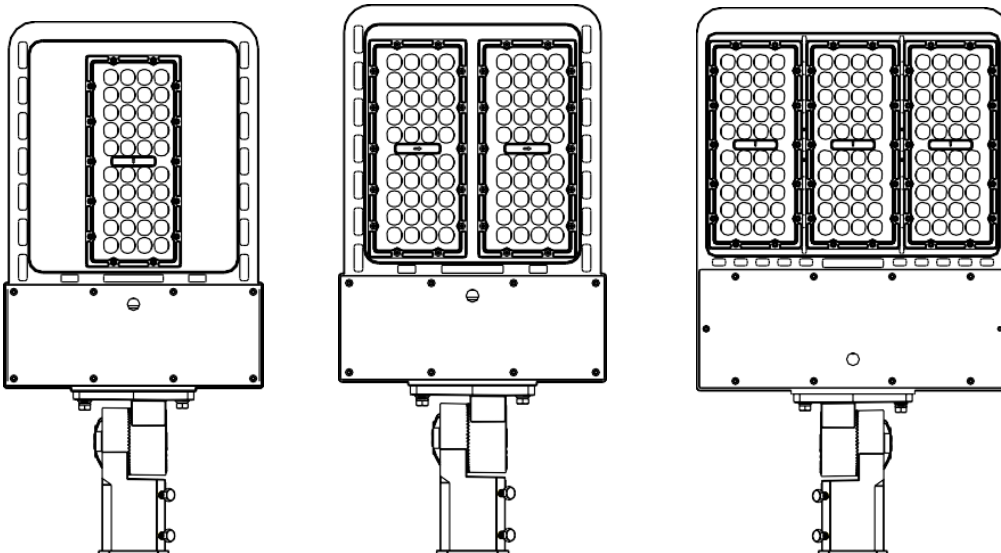

SNELSON OILFIELD LIGHTING
8622 FAIRBANKS N HOUSTON RD
HOUSTON, TX 77064

www.snelsonlights.com

713-937-3600 Phone

866-563-2832 Phone

713-937-3604 Fax


6500 SERIES LED

ORDERING INFORMATION


SERIES	MOUNTING	WATTAGE/SOURCE	VOLTAGE	OPTIONS
65-L			U	
SERIES 65-L= 6500 SERIES LED MOUNTING TR = TRUNNION PM = POLE MOUNT SF = SLIP FITTER		WATTAGE 60 = 60W (8,400 LUMENS) 100 = 100W (14,000 LUMENS) 150 = 150W (21,000 LUMENS) 200 = 200W (28,000 LUMENS) 250 = 250W (35,000 LUMENS)	VOLTAGE U = 120-277V (50/60 HZ) 480 = 200-480V	OPTIONS 3 = TYPE III DISTRIBUTION 4 = TYPE IV DISTRIBUTION 5 = TYPE V DISTRIBUTION 40K = 4000K 50K = 5000K 57K = 5700K

MOUNTING


Pole Mount

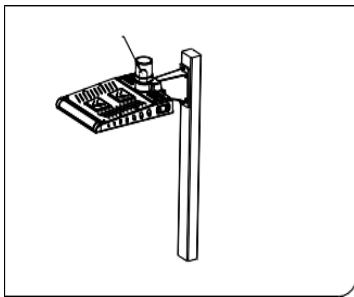


Slip Fitter

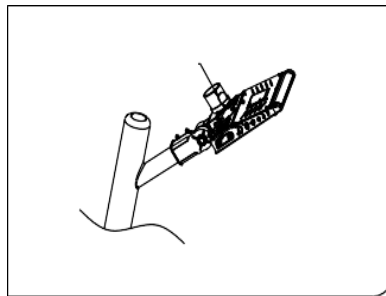


Trunnion

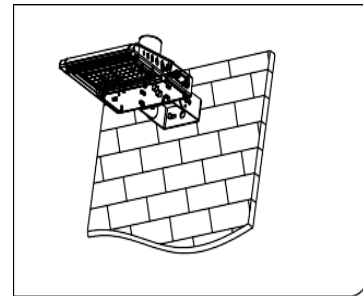


DISTRIBUTION PATTERNS



Type III




Type IV




Type V


DIMENSIONS



11.6"×23.8"×3.3"



11.6"×23.8"×3.3"



14.2"×24.8"×3.6"



SNELSON OILFIELD LIGHTING
 8622 FAIRBANKS N HOUSTON RD
 HOUSTON, TX 77064

www.snelsonlights.com

713-937-3600 Phone
 866-563-2832 Phone
 713-937-3604 Fax